

Industrial Power Specification

Model: HKI600-240PF

File No.: EQS-731-7441

Prepared by: Cuicq

Checked by: Guixu Wang

Approved by: Benqiang Wang

Issue date: 2025-07-23

[illegible]

目录 TABLE OF CONTENTS

1. 输入性能 INPUT CHARACTER	5
1.1 标称输入电压范围 Nameplate Input Voltage Range	5
1.2 输入工作电压范围 Input Voltage Range	5
1.3 最高极限输入电压 High-Point Input Voltage Range	5
1.4 交流输入频率 Input Frequency Range	5
1.5 输入电流 Input Current	5
1.6 输入冲击电流 Inrush Current	5
1.7 功率因数 Power Factor	5
1.8 谐波电流 Harmonic Current	5
2. 输出性能 OUTPUT CHARACTER	6
2.1 输出电压范围 Output voltage range	6
2.2 额定电流 Output Rated Current	6
2.3 电压调整率 Voltage Regulation	6
2.4 负载调整率 Load Regulation	6
2.5 输出纹波与杂讯 Ripple / Noise	6
2.6 容性负载能力 Capacitive load	6
2.7 整机效率 Power Efficiency	6
2.8 开机输出延时 Output Delay Time	6
2.9 输出电压上升时间 Output Voltage Rise Time	6
2.10 开关机过冲 ON/Off Overshoot	7
2.11 保持时间 Hold-Up Time	7
2.12 动态响应恢复时间 Dynamic Response Recovery Time	7
2.13 动态响应过冲 Dynamic Response Overshoot	7
2.14 低温启机 Low Temperature AC ON	7
2.15 待机功耗 Standby Consumption	7
2.16 DC OK 信号 DC OK signal(Optional)	7
2.17 均流 Currenting-sharing (Optional)	7
2.18 峰值功率 Peak power	10
2.19 电压补偿 Voltage compensation	11
3. 保护功能 PROTECTION	11
3.1 输出过流保护 Output Over Current Protection	11
3.2 短路保护 Short Circuit Protection	11
3.3 过压保护 Over Voltage Protection	12
3.4 输入欠压保护 Input Under Voltage Protection	12
3.5 过温保护 Over Temperature Protection	12
4. 安规要求 SAFETY REQUIREMENTS	12
5. 电磁兼容性 EMC	13
6. 环境适应性 ENVIRONMENT ADAPTABILITY	14
6.1 环境条件 Environment Condition	14
6.2 可靠性要求 Life Test	14
6.3 老化要求 Aging Requirements	15
6.4 震动 Vibration	15

6.5 冲击 Shock	15
7. 电源结构规格 POWRE MECHANICAL SPECIFICATION	15
7.1 电源外观尺寸 Mechanical outline	15
7.2 安装尺寸 Mounting Size	16
7.3 AC、DC 输入/输出端子	16
8. 包装 PACAGING	17
8.1 包装图 Packaging Size	17
8.2 产品标签图 Label Drawing	18
8.3 运输 Transports	19
9. 样机图片 SAMPLE FIGURES	19

Functional Specification

1. 输入性能 INPUT CHARACTER:

项目 Item		最小值 Min	典型值 Normal	最大值 Max	单位 Units	测试条件 Conditions
1.1	标称输入电压范围 Nameplate Input Voltage Range	100	115/230	240	VAC	额定输入电压范围 Rated input voltage range
		120		310	VDC	
1.2	输入电压范围 Input Voltage Range	85		264	VAC	输入电压 < 100Vac 与 < 120 Vdc 时, 电源需降额使用, , 降额系数-1.33%/V。 Derating -1.33%/V for the voltage < 100Vac and < 120 Vdc
		102		372	VDC	
1.3	最高极限输入电压 High-Point Input Voltage Range	-	-	300	VAC	在此输入条件下可以持续 15S 满载 Can last for 15 seconds under this input condition full load
1.4	输入频率范围 Input Frequency Range	47	50/60	63	Hz	正常工作 Normal operation
1.5	输入电流 Input Current	-	-	8.5	A	100Vac 输入/满载 100Vac input/full load
		-	-	8.5	A	120Vdc 输入/满载 120Vdc input/full load
		-	-	15	A	100Vac 输入//峰值负载 1200W(50A) 持续 5S 100Vac input/Peak load 1200W(50A)continue 5S
		-	-	15	A	200Vac 输入///峰值负载 2100W(87.5A)持续 5S 200Vac input/Peak load 2100W(87.5A)continue 5S
1.6	输入冲击电流 Inrush Current Note (1)	-	-	35	A	115Vac 输入冷起机 25℃ At 25℃ cold start Input 115Vac
		-	-	70		230Vac 输入冷起机 25℃ At 25℃ cold start Input 230Vac
1.7	功率因数 Power Factor	>0.94			N/A	115Vac/230Vac 输入/满载 115Vac/230Vac input / Full load
1.8	谐波电流 Harmonic Current: Note (2)	-	class A	-	N/A	IEC61000-3-2

Note(1): 电源的浪涌电流应该不超过标准元件的规格值（包括整流桥，保险丝及浪涌限制元件）。

Power supply inrush current shall be less than the ratings of its critical components (including rectifier bridge, fuses, and surge limiting devices) under all conditions of line voltage of Sections .

Note(2): 电源的 L 与 N 线上谐波电流应该满足 IEC61000-3-2 标准 A 类设备要求。输入功率大于 75W 样品需要在 230V/50Hz 条件下测试。

The harmonic of the power line and neutral current shall comply the standard IEC61000-3-2 for class A equipment.
The Measurement shall be performed at 75W input power and full output load, Input voltage shall be 230Vac/50Hz




2. 输出性能 OUTPUT CHARACTER

项目 Item		最小值 Min	典型值 Normal	最大值 Max	单位 Units	测试条件 Conditions
2.1	输出电压范围 Output voltage range Note (3)	21.6	24	28.8	Vdc	全范围输入/空载~满载, 测试点—输出端口. 电位器调压 Full range input/No load~Full load, Test point--output terminal Using the Potentiometer.
2.2	输出电流范围 Output Current range	0	-	27.1	A	输出额定功率为 650W, 客户使用时不允许超出额定功率, 例如: 24V/27.1A → 28.8V/22.57A Rated output power is 650W, Client use not exceeding rated power, E.g. 24V/27.1A → 28.8V/22.57A
2.3	电压调整率 Voltage Regulation	-0.2	-	0.2	%	全范围输入/最小负载~满载 Full range input / Min load-Full load
2.4	负载调整率 Load Regulation	-0.5	-	0.5	%	全范围输入/最小负载~满载 Full range input / Min load-Full load
2.5	输出纹波/杂讯 Ripple / Noise Note (4)	-	-	120	mV	输入 115Vac/230Vac 常温 25° C Input 115Vac/230Vac@25°C
		-	-	500	mV	其他条件 (低温-40°C~-10°C) Other condition(-40°C~-10°C)
2.6	容性负载能力 Capacitive load	108000	-	-	uF	标称输入/满载/铝电解电容/额定电压 Nominal Range Input / Full load/ Aluminum electrolytic Capacitor/Rate Voltage
2.7	整机效率 Power Efficiency	87	88	-	%	输入 230Vac、满载、常温下/额定电压 Input 230Vac/ Full load/25°C/Rate Voltage
2.8	开机输出延时 Output Delay Time	-	-	2500	mS	100Vac 输入/最小负载~满载 100Vac input / Min load-Full load
2.9	输出电压上升时间 Output Voltage Rise Time			50	mS	全范围输入/最小负载~满载 Full range input / Min load-Full load

2.10	开关机过冲 ON/Off Overshoot	-	-	3	%	全范围输入/最小负载-满载 Full range input / Min load-Full load
2.11	保持时间 Hold-Up Time	20	-	-	mS	输入 115Vac/230Vac 满载/额定电压/输出电压从 100%跌落至 95%额定输出电压 Input 115Vac/230Vac / Full load/Rate Voltage/Vout: 100%-95% rated voltage
2.12	动态响应恢复时间 Dynamic Response Recovery Time	-	-	1	mS	负载变化, 电流变化率 1A/us, , 周期 1mS 和 10mS 10%~90%~10% Full load, Current change rate 1A/us, Period 1mS and 10ms
2.13	动态响应过冲 Dynamic Response Overshoot	-5	-	+5	%	
2.14	低温启机 Low Temperature AC ON	-	OK	-		-40℃,100Vac 满载可以启机 -10℃,100Vac 满载一次性启机 Input 100Vac / Full load/-40℃; start up Full load; Input 100Vac / Full load/-10℃; start up once time Full load;
2.15	待机功耗 Standby Consumption	-	-	NA	W	230VAC, 额定输出电压, 空载 under no load ,rated output voltage and 230Vac input voltage.
2.16	DC OK 信号 DC OK SIGNAL (Optional) Note (5)		Y			TTL 电平, 电源正常状态 3.3-5.6V;电源异常状态, 输出 0-1V The TTL signal out, normal state : 3.3 ~ 5.6V ;abnormal state :0 ~ 1V .
2.17	均流 Currenting-sharing (Optional) Note (6)	-10		+10	%	满载均流功能 Full load

Note(3) : 50 度条件下连续工作不超过 $P_0=u*i$, 70 度条件下连续工作不超过 50%*PO, 50 度条件下每增加一度, 减额 2.5%的额定负载。

1, The output power shall derating 2.5% per degrade at ambitious higher than 50℃

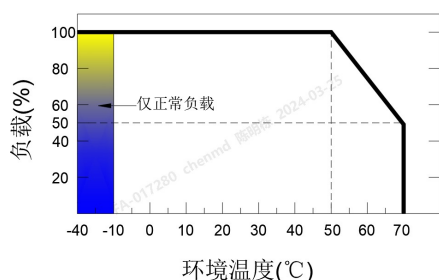

当输入电压与环境温度均需降额时, 需同时执行 2 种降额曲线, 例如:

When both input voltage and ambient temperature require derating,two derating curves need to be executed simultaneously,such as:

- 1、当输入电压 85VAC, 环境温度 70℃时, 输出最大功率为 $80\% \times 50\% \times P_0$;

When the input voltage is 85VAC and the ambient temperature is 70℃,the maximum output power is $80\% \times 50\% \times P_0$;

- 2、当输入电压 102VDC, 环境温度 70℃时, 输出最大功率为 $76\% \times 50\% \times P_0$.

When the input voltage is 102VDC and the ambient temperature is 70℃,the maximum output power is $76\% \times 50\% \times P_0$;

Note(4) : 纹波和噪声测试方法: 使用一条 12cm 双绞线, 同时终端要并联 0.1uF 陶瓷电容和 10uF 电解电容, 在 20MHZ 带宽下进行量测。

Ripple & Noise testing method: A 0.1uF CERAMIC capacitors and 10uF electrolytic capacitors should be put across output terminals during ripple & noise test. The oscilloscope bandwidth is set at 20 MHz and a 12cm twisted-pair will be used to measure it.

Note(5): DC OK 信号 DC OK signal

DC OK 信号是一个集电极开路信号, PSU 启动时为高电平。


The DC OK signal is an open collector signal,which is high when the PSU is started.

Between DC- OK(pin1) and GND(pin2)	Output Status
0 ~ 1V	OFF
3.3 ~ 5.6V	ON

Note(6): 均流使用说明 Currenting-sharing using notes

2台机并联使用时, 禁止将电源上下叠起来安装。相邻电源之间必须留有一定散热空隙安装时。尽量选择紧贴客户系统的钣金件, 充分利用系统结构散热。

When 2pcs machine are used in parallel, the power should be separating.Power should be mounted on a metal to cool off

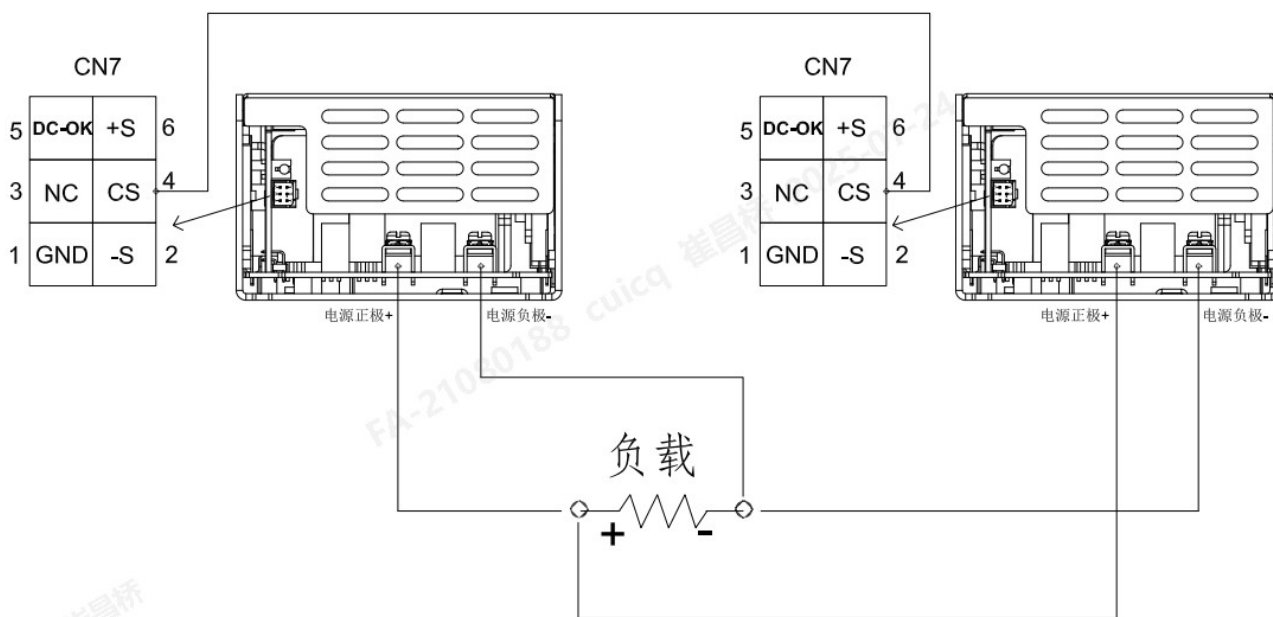


接负载线长要求一致

2.18 峰值功率 Peak power

$$P_{av} = \frac{P_{pk} * t + P_{npk} * (T - t)}{T} \leq 800W$$

$$\text{Duty} = \frac{t}{T} * 100\% \leq 35\%$$

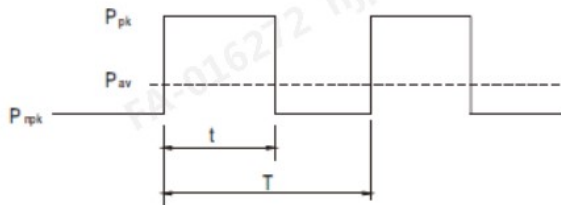

P_{av} :Average output power (W)


P_{pk} :Peak output power (W)

P_{npg} :Non-peak output power (W)

P_{rated} :Rated output power (W)

t :Peak power width(sec)

T :Period(sec)

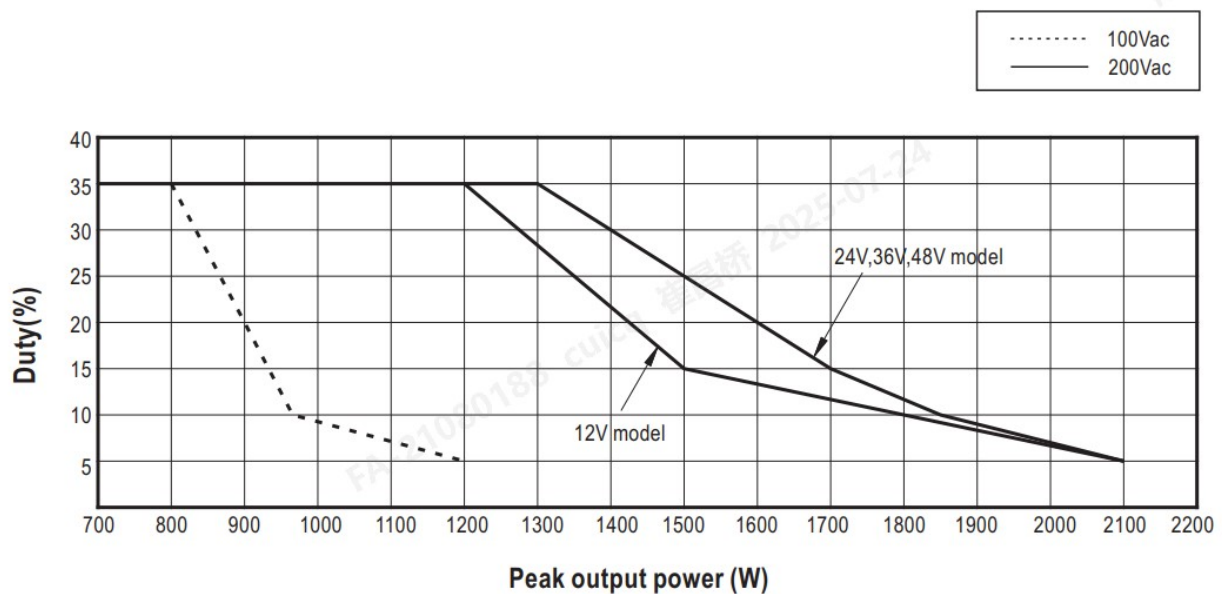

For example (24V model)

$V_{in}=200V$ Duty_max=25%

$P_{av}=1.2P_{rated}=800W$

$P_{pk}=1500W$

$t \leq 5 \text{ sec}$

$T \geq \frac{5 \text{ sec}}{25\%} \geq 20 \text{ sec}$


$$P_{npk} \leq \frac{TP_{av} - t_{Ppk}}{T - t}$$

$$P_{npk} \leq 566W$$

2.19 电压补偿 Voltage compensation

本电源具有电压补偿功能，最大补偿电压为 0.5V。

The power supply has the function of Voltage compensation. The maximum compensation voltage is 0.5V.

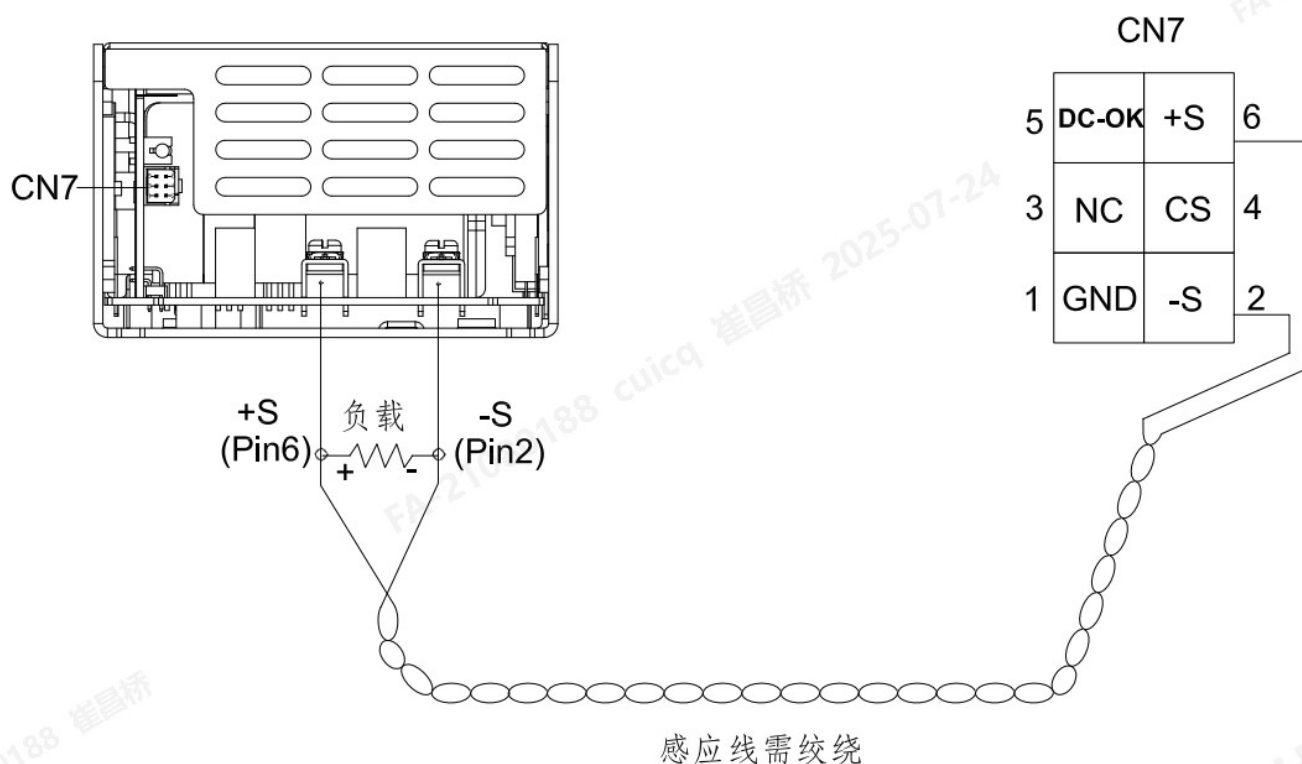

3. 保护功能 PROTECTION

3.1 输出过流保护 Output Over Current Protection

当输出电流超过 130%-210%额定电流且超过 5 秒时，关断输出电压，电源重启后可恢复正常输出；

If the output current exceeds the rated value by 130%-210% for more than 5 seconds, the output voltage will be turned off, and normal output can be restored after the power is restarted.

3.2 短路保护 Short Circuit Protection

当输出端短路时电源不能被损坏、不能起火燃烧，短路消除后，电源重启可恢复正常输出；

When output is short, the power supply don't be damaged, don't burst into flames, after the short is eliminated, restarting the power supply can restore normal output.

3.3 过压保护 Over Voltage Protection

测试项 Sense Level	过压值 Over Voltage	保护模式 Protection Mode
Over Voltage Protection	29V-35V	锁死保护 Locking Protection

电源在输出过压时保护，电源重启可恢复正常输出。

The power supply should protect itself when the output achieve over voltage, and normal output can be restored after the power is restarted..

3.4 输入欠压保护 Input Under Voltage Protection

交流输入欠压保护点: <80Vac

The power supply should protect itself when the input brown out Occur(<80Vac)

3.5 过温保护 Over Temperature Protection

电源支持过温保护，自恢复，过温保护点确保所有器件温度规格不超标。

The power supply should protect itself when OTP occur, and it will recover when the breakdown's removed.
The OTP points ensure all device temperature specifications.

4. 安规要求 SAFETY REQUIREMENTS AND CERTIFY

该系列电源设计符合下列安全规格：

1. 满足 IEC60950&IEC62368 最新标准要求。
产品标有 CCC, CB 标识。

The power supply has been certified by CCC ,CB Safety mark shall appear on the product.

The supplier must obtain certification for the product to latest revision IEC 60950&IEC62368 standard, latest revision EN62368 covering all European Country Deviations from a European based Certified Body test agency.

项目 Item	等级 Grade	标准 Standard (或测试条件 Test Conditions)
输入对输出 Input to output	3000Vac/50Hz	持续 1 分钟, 无击穿, 无飞弧现象。One minute,no breakdown,no flight arc,(open the discharge tube during tests)
输入对地 Input to earth	2000Vac/50Hz	持续 1 分钟, 无击穿, 无飞弧现象 One minute,no breakdown,no flight arc.(open the discharge tube during tests)
输出对地 Output to earth	500Vac/50Hz	持续 1 分钟, 无击穿, 无飞弧现象 One minute,no breakdown,no flight arc.(open the discharge tube during tests)
绝缘电阻 Insulating resistance	100MΩ	常温常压下, 相对湿度为 90%, 试验电压为直流 500V 时, 整流器主电路的交流部分和直流部分对地, 以及交流部分对直流部分的绝缘电阻均不低于 100MΩ. Measure voltage 500VDC(open the discharge

		tube during tests)
漏电流 Leak current	$\leq 10\text{mA}$	输入 264Vac60Hz Input 264Vac/60Hz

2: 结构安全标准符合 CCC GB4943 ; Mechanical Safety refer to CCC GB4943;

3: IP 防护等级 IPX0; Degrees of protection provided by closure IPX0;

4: 工作海拔要求 5000m; Operating to 5000 meters;

5: 工作环境污染等级定义; Pollution II;

5. 电磁兼容性 EMC

项目 Item	指标要求 Index requirements	标准 Standard
传导干扰 (CE) Note (7)	without connection between output „-,„ and Earth	EN55032 Class B
辐射干扰 (RE) Note (7)	without connection between output „-,„ and Earth	EN55032 Class B
静电抗扰 (ESD)	空气放电 Air $\pm 8\text{KV}$ Level3	IEC61000-4-2 Category B
	接触放电 Indirect Contact $\pm 6\text{KV}$ Level 3	IEC61000-4-2 Category B
快速瞬间变脉冲群 (EFT/B)	4KV(Level 4) / 2KV (level 3)(power line)	IEC61000-4-4 Category B
浪涌 (SURGE)	交流输入端口时, 线对线 L-N: $\pm 2\text{kV}$, 线对地 L&N-PE: $\pm 4\text{kV}$, 8/20(1.2/50) μs 波	IEC61000-4-5 Category B
CS	0.1...80MHz (1KHz AM 80%) 10V Level 3-Asymmetrical,	IEC61000-4-6 Category A
RS	80...3000MHz (1KHz AM 80%) 10V/m Level 3 criteria A	EN 61000-4-6 criteria A
Magnetic Field Immunity	50Hz and 60Hz: 10A/m : criteria A 30A/m : criteria B	IEC61000-4-8
电压跌落和短时中断 (DIP)	0% during 0,5 and 1 period 40% during 10/12 fluctuations 70% during 25/30 fluctuations 80% during 250/300 fluctuations	EN 61000-4-11 criteria B
谐波电流	满足 Class A 类产品的限制要求	IEC6100-3-2
电压波动和闪烁	0% during 250/300 fluctuation	IEC6100-3-3 criteria B

性能判据 A (连续现象)

在干扰过程中, 直流输出范围应与 在正常服务条件一致: DC 输出电压的波动应在 $\pm 10\%$ 内;

干扰过程中或结束后, 被测设备运行时不应有告警, 错误告警指示 (电源故障、保护故障等) 和错误显示。

性能判据 B (瞬变现象)

a) 在试验过程中, 直流输出端的电压不应超出最大值;

b) 在干扰过程中出现的波峰群应忽视;

- c) 干扰结束后, 被测设备运行时不应有告警, 错误告警指示 (电源故障、保护故障等) 和错误显示;
- d) 在干扰结束后, 应自动恢复到正常性能。

性能判据 C (中断)

功能的暂时丧失是允许的, 所规定的功能是可自动恢复的或能被操作者恢复, 或被正常的后来的运行恢复。

性能判据 D (抵抗性)

设备应承受测试没有损坏或其它干扰 (如软件损坏或故障保护设备的误操作), 而且在瞬变电磁现象结束后适当地在规
定界限内运行。(不要求当测试进行时适当运行)。干扰可以造成保险丝或其它规定设备的动作, 而不得不在正常运行恢
复前替换或复位。

Performance Criteria Description :

A——normal performance within limits specified by the manufacturer, requestor or purchaser.

B——temporary loss of function or degradation of performance which ceases after the disturbance Ceases, and from which the equipment under test recovers its normal performance, without operator Intervention.

C——temporary loss of function or degradation of performance, the correction of which requires Operator intervention.

D——loss of function or degradation of performance which is not recoverable, owing to damage to Hardware or software, or loss of data.

Note (7) : 电源应视为系统内元件的一部分, 所有的 EMC 测试都将测试样品安装在一个长*宽*高=600mm*400mm*2mm 的金属铁板上测试。

The power supply should be considered as a part of the components within the system, and all EMC tests will install the test sample on a metal iron plate with a length*width*height=600mm*400mm*2mm for testing.

6. 环境适应性 ENVIRONMENT ADAPTABILITY

6.1 环境条件 Environment Condition

项目 Item	最小值 Min	典型值 Normal	最大值 Max	单位 Units	备注 Note
工作温度 Operation Temperature	-40	25	70	°C	
储存温度 Storage Temperature	-40	25	85	°C	--
工作湿度 Operation Humidity	5	--	95	%	无冷凝 no condensation
储存湿度 Storage Humidity	5	--	95	%	无冷凝 no condensation
大气压力 Atmospheric Pressure	86	--	106	KPa	
散热方式 Emitting Heat Mode	电源自带风扇 with fan				

6.2 电源寿命测试 Life Test

6.2.1 ECAP Life $\geq 30000h$

电源环境温度 40°C 及额定输入与满载条件下, 电容寿命至少 30000Hours。

The power life time shall be at least 30000Hours, when the ambient temperature is 40°C at full load.

6.2.2 MTBF > 150000h

电源环境温度 40°C 及额定输入与满载条件下, 按照 IEC 61709 (SN 29500) 标准, MTBF 大于 150000Hours

The MTBF shall be at least 150000Hours when the ambient temperature is 40°C at full load.

>150000h acc. IEC 61709(SN29500) at 40 Degree

6.3 老化要求 Aging Requirement

电源老化时间参考电源企业内部产品老化时间升降流程作业。

老化条件: 额定电压 230Vac 输入, 80%载, 45-/+5℃.

The Aging time refers to manufactory criterion.

Aging condition; 230Vac, 80% load 45-/+5℃.

6.4 震动 Vibration

10~500HZ, 5G 10 分钟/周期, X、Y、Z 轴各 60 分钟。(单台机子)

Between 10HZ and 500HZ, 5G 10 minutes per cycle, 60 minutes at per X、Y、Z directions. (1 set)

6.5 冲击 Shock

加速度 30g, 每个方向各 6 次, X、Y、Z 轴, (单台机子)


Shock acceleration 30g, and 6 times per X、Y、Z direction. (1 set)

7. 电源结构规格 POWRE MECHANICAL SPECIFICATION


7.1 电源外观尺寸 Mechanical outline

外壳尺寸 L*W*H=215*100*63.5mm。

Enclosure size L*W*H=215*100*63.5mm.

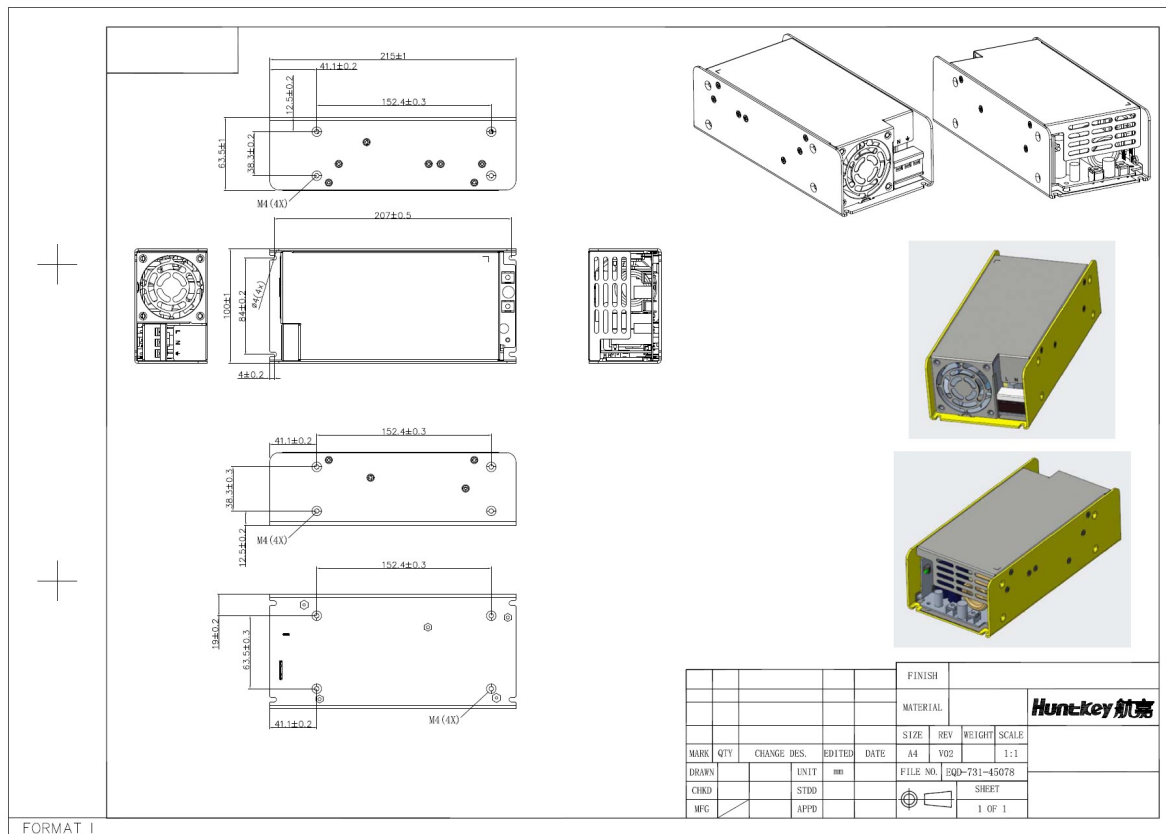


7.2 安装尺寸 Mounting Size

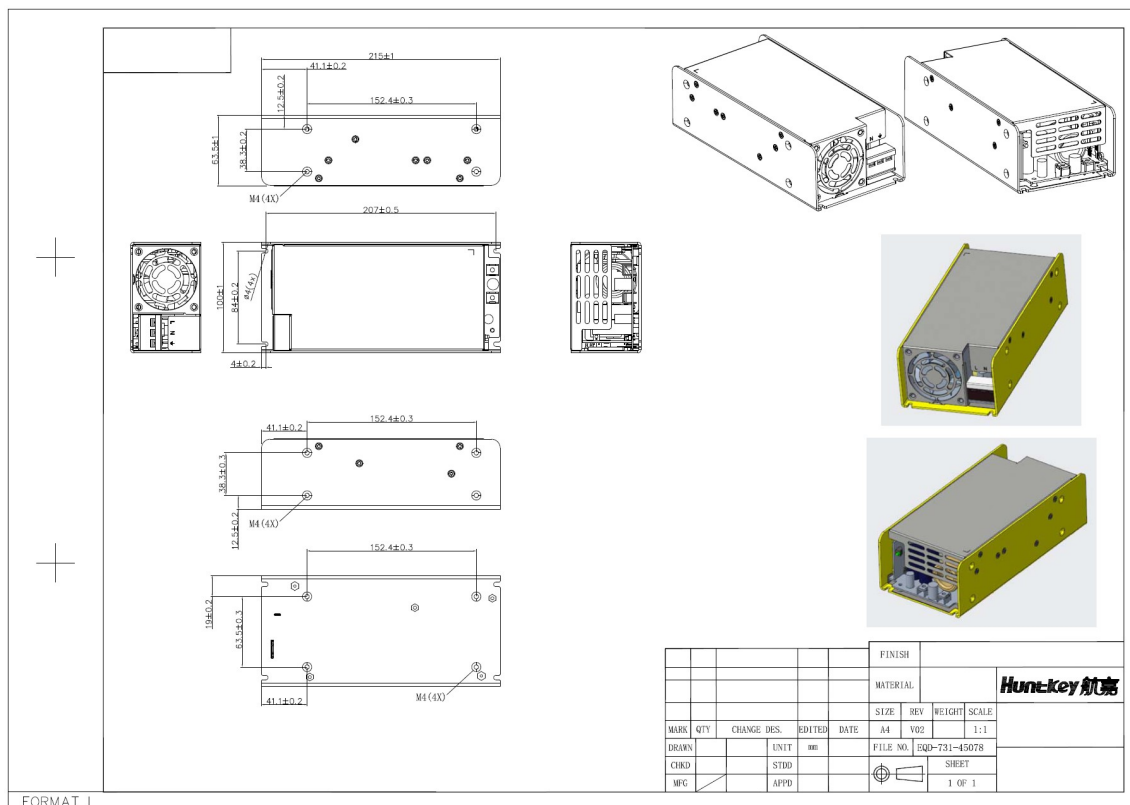

注意：客户安装时的螺钉规格为：M4，长度为 4mm；

Note: the screw specifications for customer installation are: M4, length is 4mm.

7.3 AC、DC 输入/输出端子

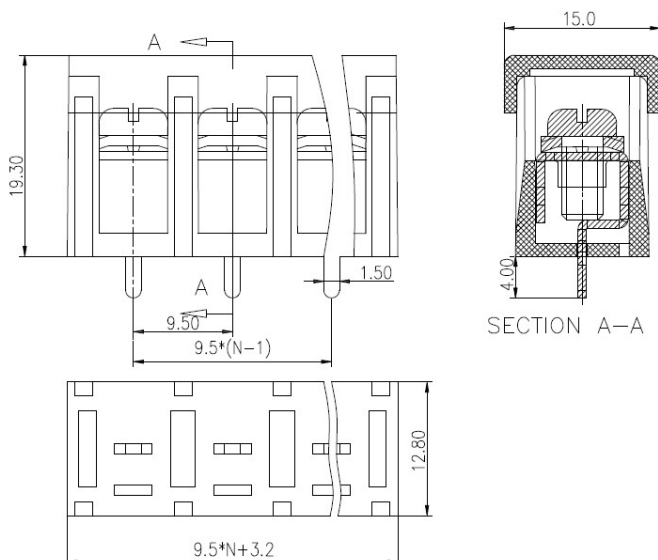

材质及电镀

焊脚: 黄铜, 镀锡
塑件: PA66, UL94V-0
螺丝: M4, 钢, 镀镍
线数: 3P

电气性能


额定电压: 300V
额定电流: 25A
温度范围: -40° C ~ +105° C
绝缘电阻: 500MΩ/1000V
耐电压: AC2500V/1Min
使用线径: 22-10AWG
最大锁紧扭力: 12.24kgf.cm


注: 此产品图中“N”表示五金件夹子的个数, “Y”表示塑件的颜色代码, 具体参照我司色卡。

8. 包装 PACAGING

8.1 包装图 Packaging Size.

单机用纸盒包装, 然后放入瓦楞纸箱。纸箱内尺寸 L430*W280*H262mm. 包装数量 10pcs/箱.

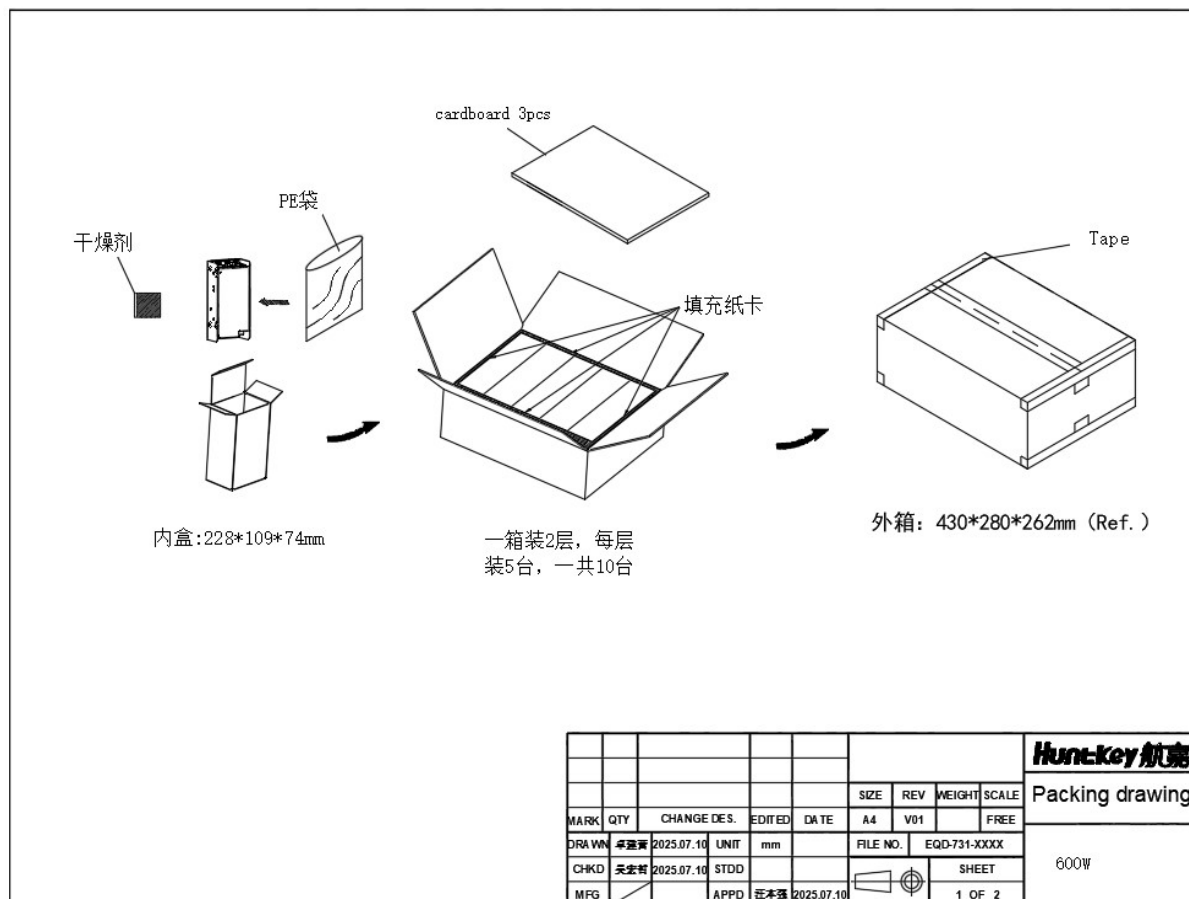

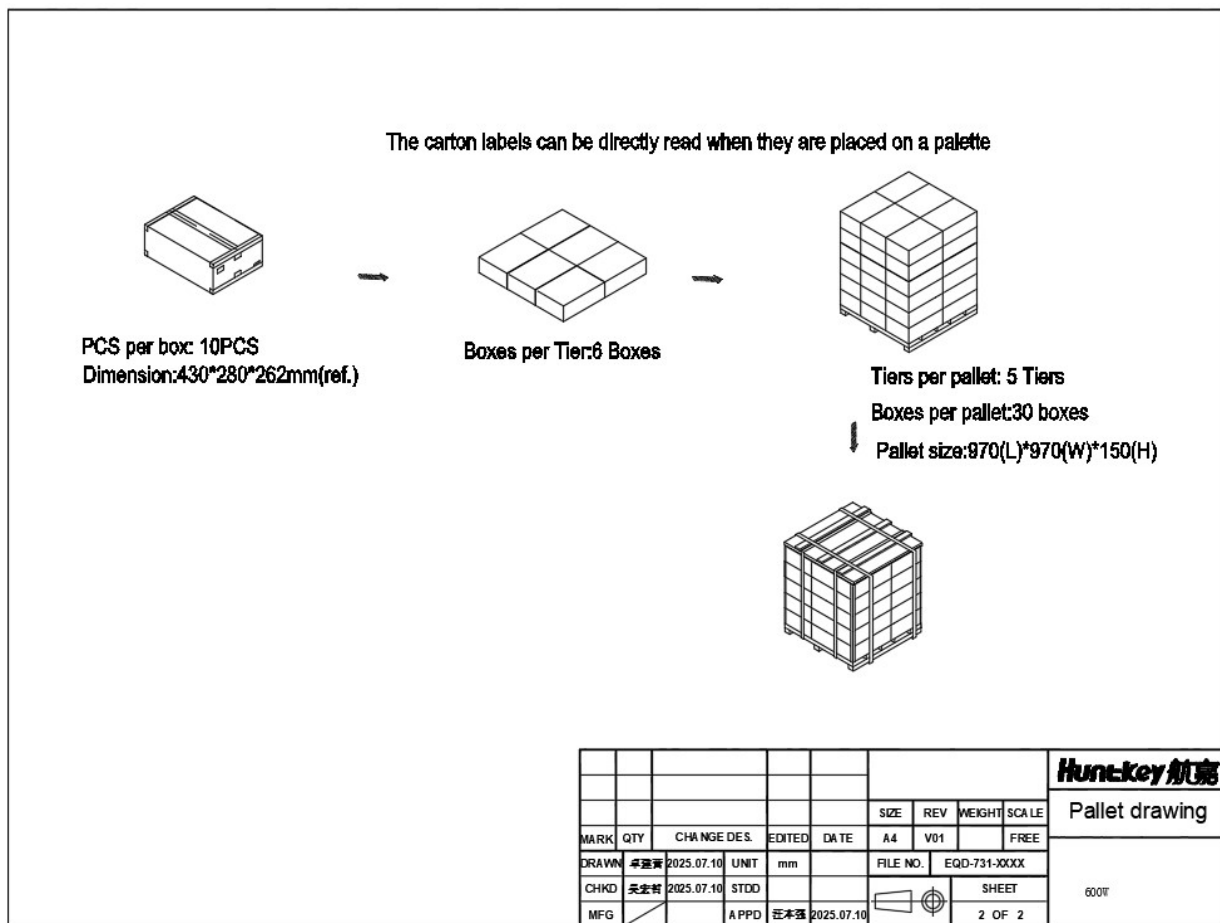


8.2 产品标签图 Label Drawing(for reference)



8.3 运输 Transports

包装储运图示标志有：向上、小心轻放、怕湿、堆码极限等标志（标志应清楚、整齐、耐久）。

Upwards, Handle with care, Isolated to water, Take care to put symbol in the carton .(The label should be clear, tidy, durable)

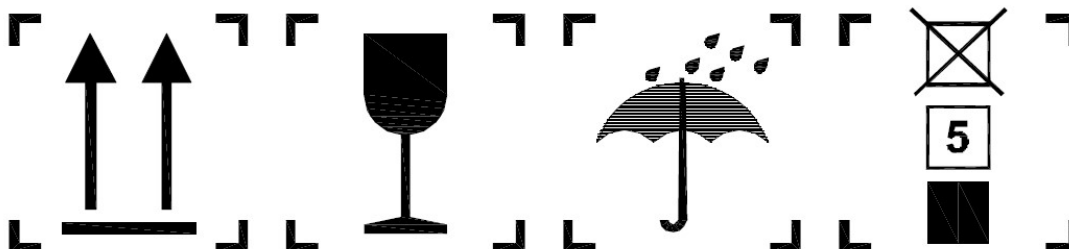

9. 样机图片 Sample Figures



ShenZhen Huntkey Electric Co., Ltd		File No. :
		Version : 03
Prepare by:	Check by:	Approved by:
Cui Changqiao	Wang Guixu	Wang Benqiang
Date:	2025-07-23	